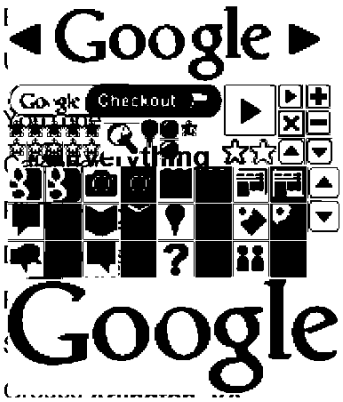

1. Postfix: документация postfix, ссылки, обмен опытом, форум ...

   response **code** when a recipient domain matches $mydestination or ..... is the **Sendmail**-compatible mail **queue** listing command. # mailq path

2. r virus ...

   by PV Radatti - 2010 - Related articles
   May 11, 2010 ... **Proscribed code** run processing starts by acquiring a lock on the PC, ... is moved from the captured **sendmail queue** into the sample's run mqueue subdirectory , ... using a **proscribed code scanner** such as CyberSoft's VFIND. ...
   www.freepatentsonline.com/7716736.html - Cached
3. **Sendmail** V8: A (Smoother) Engine Powers Network Email - Network ...

   Two critical tasks that **Sendmail** performs--rather than being hard-**coded** in the ..... is normally not run in daemon mode, nor does it maintain a mail **queue**. ...
   www.networkcomputing.com/unixworld/.../008/008.txt.html - Cached - Similar
4. [PDF] MailScanner Manual - Open source Secure Mail Gateway Software

   File Format: PDF/Adobe Acrobat - Quick View
   <Object **Codebase** =...> tags. Configurable options allow logging, passing, deleting, ... required for **sendmail**. This can also be the filename of a ruleset. ... mail **queue**. On **Scanner** Nodes with plenty of unused memory, increasing ...
   www.fsl.com/support/Mail**Scanner**-Manual-Version-1.0.1.pdf - Similar
5. The Spamhaus Project - Frequently Asked Questions (FAQ)

   Spamhaus uses this general convention for return **codes**: ... and **code** to do this is also available as a **sendmail** milter from here. .... spam to be rejected early in the transaction before it burdens servers, disks and mail **queues**. ... If you prefer to brew your own **code**, below is the information you will need: ...
   www.spamhaus.org/faq/answers.lasso?section... - Cached - Similar
6. Scalix Forums • View topic - Scalix & Amavisd-New HOWTO - Wiki updated

   15 posts - 4 authors - Last post: Sep 12, 2006
   Of course running **sendmail** as root is generally considered to be bad thing (tm), ... I added **code** to set a global flag at this point if the attributes value was 'maia' ... simply define an alternate **queue** with correct perms for the amavis user instead. ... Starting virus-**scanner** (amavisd-new): done ...
   www.scalix.com/forums/viewtopic.php?p=17198&sid... - Cached

   Get more discussion results
7. FreeBSD web and e-mail server » My first FreeBSD 5.4.x web and e ...

Apr 5, 2009 ... Now we need to config qmail and kill **sendmail** etc. .... chmod 4755 qmail-**scanner** -**queue**.pl && chown qscand:qscand qmail-**scanner**-**queue**.pl ... E-mail: URL: Message : CAPTCHA **Code**. CAPTCHA Image CAPTCHA Audio Refresh Image ... isspiss.is/freebsd/emailserver/?p=1 - Cached

8. QR **Code** readers

   Optiscan is a professional quality QR **Code** tool, featuring a **scanner** over ten times faster than any other available on the App Store. ... www.qrme.co.uk/qr-**code**-resources/qr-**code**-readers.html - Cached - Similar
9. Linux: Configurar **Sendmail** - sendmai.cf

   Nov 24, 2004 ... Instalação do **scanner** HP Scanjet 2400 no Ubuntu 10.04 LTS Instalando fontes no Debian .... checkpoint **queue** runs after every N successful deliveries ... error **message** header/file #O ErrorHeader=/etc/mail/error-header ... www.vivaolinux.com.br/etc/sendmai.cf-jpfaria - Cached
10. **[PDF]** FOSS Network Security

    File Format: PDF/Adobe Acrobat - Quick View
    Server Security, Host/Network **Scanning** and Intrusion Detection System ..... Therefore, while preserving open access to the source **code**, the ..... That would process the **sendmail queue** every 20 minutes (if it exists). Other Mail Servers ... www.apdip.net/publications/fosseprimers/foss-network-ncover.pdf - Similar